




# Lintels

## Extensive Range of Reinforced Concrete Lintels

Our lintels are manufactured using high grade 50N/mm<sup>2</sup> grade concrete and have been designed and manufactured in accordance with IS EN 845.


We stock a wide range of sizes ensuring short lead times and competitive pricing.

Reinforced 6" x 4" Lintel

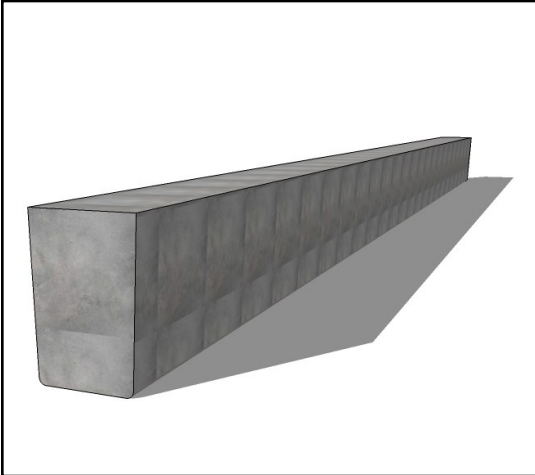


	Depth	Width	Available Sizes
in"	6"	4"	1'6" to 13'0"
mm	150	100	@ 6" intervals
Weight	34.5		kg/m
	10.5		Kg/ft

Reinforced 9" x 4" Lintel

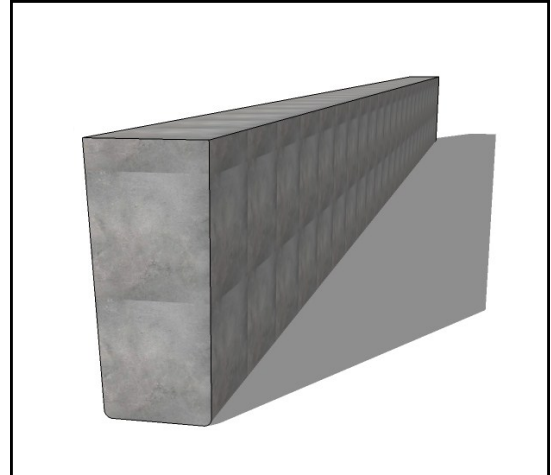

	Depth	Width	Available Sizes
in"	9"	4"	1'6" to 13'0"
mm	225	100	@ 6" intervals
Weight	52		kg/m
	16		Kg/ft

Reinforced 9" x 6" Lintel

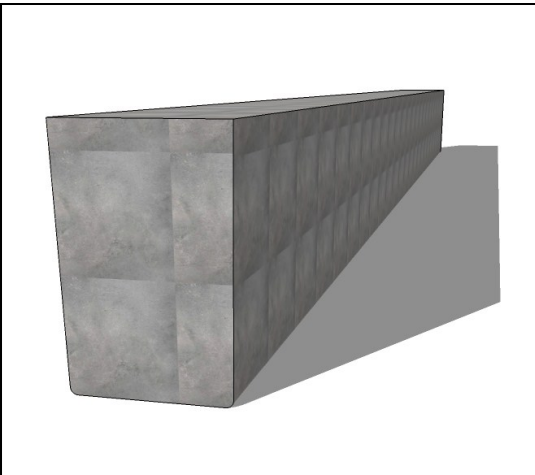


	Depth	Width	Available Sizes
in"	9"	6"	1'6" to 13'0"
mm	225	150	@ 6" intervals
Weight	71.5		kg/m
	22		Kg/ft

### Length Conversion Tables


ft' in"	mm	ft' in"	mm
1' 6"	457	7' 6"	2286
2' 0"	610	8' 0"	2438
2' 6"	762	8' 6"	2591
3' 0"	914	9' 0"	2743
3' 6"	1067	9' 6"	2896
4' 0"	1219	10' 0"	3048
4' 6"	1372	10' 6"	3200
5' 0"	1524	11' 0"	3353
5' 6"	1676	11' 6"	3505
6' 0"	1829	12' 0"	3658
6' 6"	1981	12' 6"	3810
7' 0"	2134	13' 0"	3962

Prestressed 9" x 4" Lintel

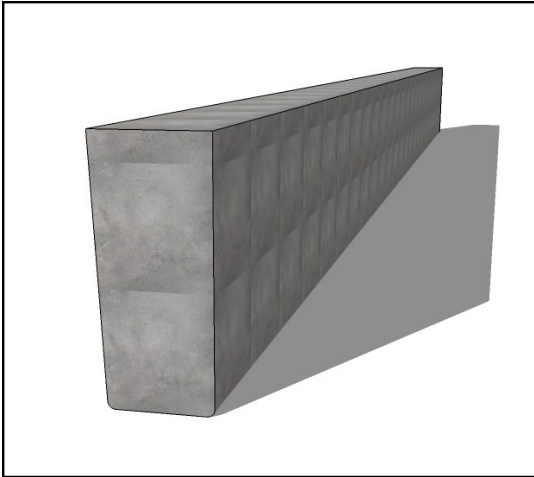

	Depth	Width	Available Sizes
in"	9"	4"	7'0" to 12'6" @ 6" intervals
mm	225	100	& 13'9" & 14'9"
Weight	50.5		kg/m
	15.5		Kg/ft

Prestressed 4" x 3" Lintel

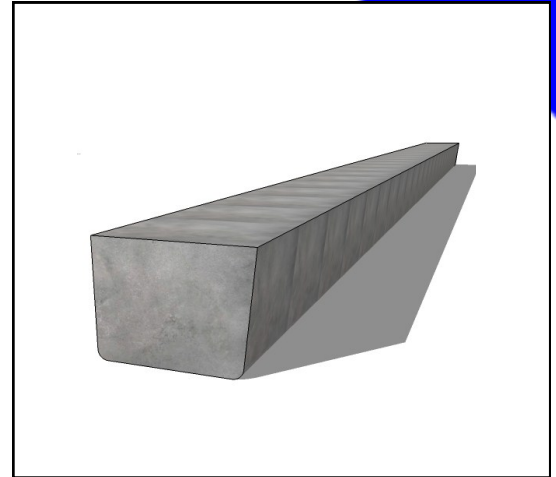


	Depth	Width	Available Sizes
in"	3"	4"	3'0" to 8'6" @ 6" intervals
mm	65	100	
Weight	16.8		kg/m
	5		Kg/ft

# Padstones

## Spread the load with RC Padstones

Padstones are stronger than a masonry block and distribute loads more efficiently through adjoining blockwork. This reduces the potential for cracks and structural failure.


6" x 4" Padstone

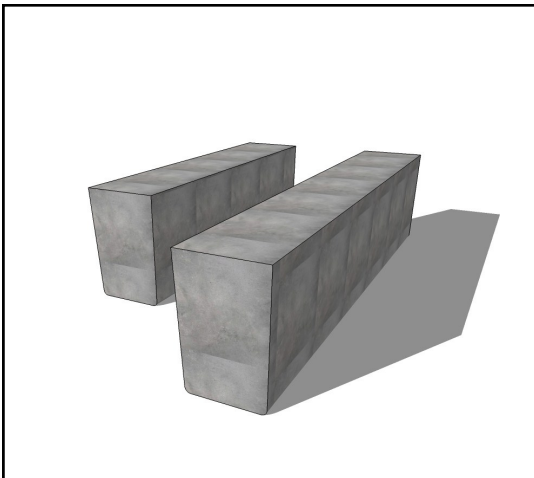

	Depth	Width
in"	6"	4"
mm	150	100

	Length		Weight
1	18"	450mm	15.5 kg
2	24"	600mm	20.5 kg

9" x 4" Padstone

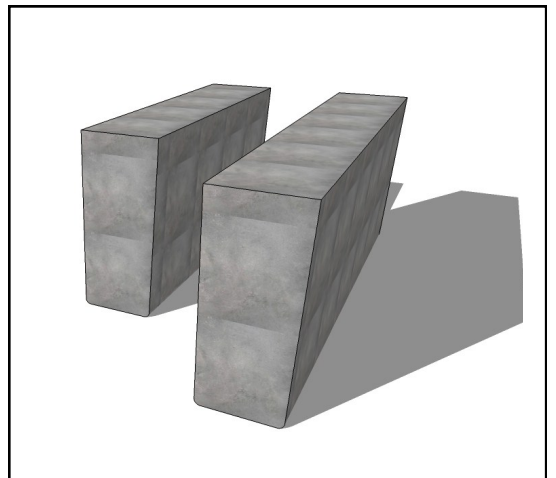

	Depth	Width
in"	9"	4"
mm	225	100

	Length		Weight
1	18"	450mm	23.5 kg
2	24"	600mm	31 kg